



Industria Slab

DESCRIPTION: Slab **TEXTURE:** Smooth, Granitex or Polished

PALLET OVERVIEW



EXPANDING DESIGN HORIZONS WITH LIVEABLE ROOFTOPS.

COOL ROOF

High Solar Reflectivity

CONCRETE PRODUCT WITH SUPERIOR STRUCTURAL PROPERTIES

Exceeds ASTM C1491 and CSA 231.1 standards.

LENGTHENS ROOF LIFE SPAN

Protects the waterproofing membrane from UV rays and accidental perforations.

EASY ACCESS FOR MAINTENANCE

When installed on pedestals, INDUSTRIA slab can be moved for roof system maintenance.

NOTES


See page 21 to 25 for more technical information.

*Colors available on order only. A minimum of 2500 ft² is required to place an order.

Smooth and Granitex

Specifications per pallet

	Imperial	Metric
Cubing	54.25 ft²	5.04 m ²
Weight	1 555 lbs	705 kg
Number of rows	7	
Coverage per row	7.75 ft ²	0.72 m ²
Linear coverage per row	3.94 lin. ft	1.20 lin. m




Unit dimensions	in	mm	Units/pallet
Height	2 3/8	60	14 units
Depth	23 5/8	600	
Length	23 5/8	600	

Polished

Specifications per pallet

	Imperial	Metric
Cubing	54.25 ft²	5.04 m ²
Weight	1 555 lbs	705 kg
Number of rows	7	
Coverage per row	7.75 ft ²	0.72 m ²
Linear coverage per row	3.94 lin. ft	1.20 lin. m



Unit dimensions	in	mm	Units/pallet
Height	2 5/16	58	14 units
Depth	23 5/8	600	
Length	23 5/8	600	

NEW

shale grey*


chestnut brown*




onyx black

greyed nickel


beige creme

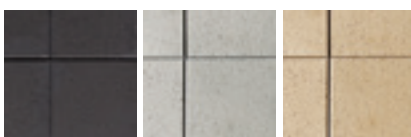

01 | Linear pattern
100% - 600x600



02 | Linear pattern
100% - 600x600



Distributed by:

ASIP
ENTERPRISES

www.aspent.com

(800) 869-9600

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.